

**Wireless Module for X-Series Alarms** 



### **The Connected Home**






## How Interconnected alarms help save lives

Every year, more than 23,000 people die from fires across the world, whilst carbon monoxide may account for up to half of all fatal poisonings globally (source US National Safety Council). Evacuating properties quickly when a danger is detected is key to reducing the number of lives lost to these two hazards.

A simple and effective way to rapidly warn people that a danger is present is to connect smoke and carbon monoxide alarms in properties together. This allows all alarms to sound when one detects a danger, giving people time to evacuate the building.



Wireless alarms have a number of advantages compared to hard-wired alarm systems, mainly because they do not require wiring. They are, therefore, much easier, faster and cheaper to install than wired alarm systems, keep disruption to a minimum and avoids potential damage to wires in a wired system.

A wireless network has added benefits for people who are in different rooms to the source of a danger and cannot see or hear it, especially if they are in a large property. Interconnected alarms increase the chance of people hearing an alarm from elsewhere in the property, giving them time to evacuate the building before the hazards affect them.


# Honeywell's wireless network helps evacuation

Honeywell's wireless modules use a flood type network, ensuring interconnected alarms send and receive information from each alarm in the network. Therefore the time taken for every alarm to sound is significantly reduced, allowing more time to evacuate a property in an emergency.



In England, Wales, Scotland and Northern Ireland, all smoke alarms in new dwellings should be interconnected so that if one detects a fire, each alarm sounds. Contact your local authority to see the latest building regulations for further information.




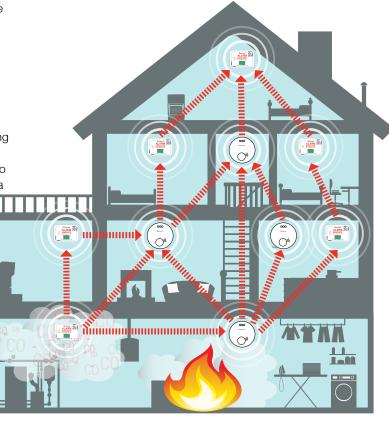

### XW100 Wireless Module





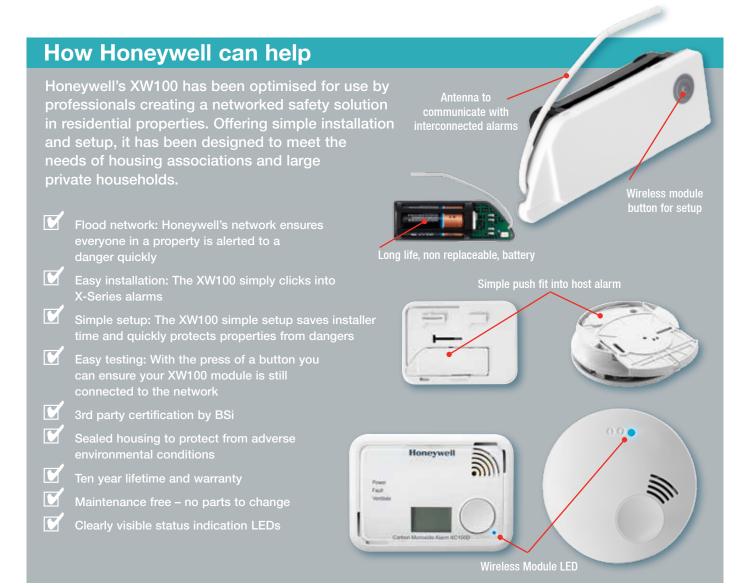

#### **Technical specification**

| Reliability             |   |
|-------------------------|---|
| Network protocol        | Flood network   |
| Radio frequency         | 868 MHz band  |
| Units in a network      | Maximum 32 units  |
| Range                   | 200m in free air (min)  |
| Alarm transmit interval | 10 seconds  |
| 3rd party approvals     | Certified to be used with X-Series Carbon<br>Monoxide and smoke and heat alarms |
| Other compliances       | RoHS REACH  |
| Self test               | Every 60 minutes  |
| Lifetime and warranty   | 10 years  |
| Operating environment   |   |
| Temperature             | -10°C to +55°C  |
| Humidity                | 25-95% RH (non-condensing) - suitable also for typical bathroom conditions      |

| Electrical and interconnection      |   |  |
|-------------------------------------|---|--|
| Power supply                        | Non replaceable, long-life lithium battery                              |  |
| Output power                        | 14dBm (nom)   |  |
| User interface                      |   |  |
| Visual indicator<br>(on host alarm) | Alarm: Red LED<br>Alarm XC100, XC100D: Big message<br>Fault: Yellow LED |  |
| Network connection                  | Blue LED  |  |
| Button                              | For network creation and to add a new module to existing network        |  |
| Product                             |   |  |
| Weight                              | 30 g  |  |
| Packaging                           |   |  |
| Туре                                | Carton box with euro hole   |  |
| Dimensions                          | 107 x 78 x 50 mm  |  |
| Scope of supply                     | Wireless module, Instruction manual                                     |  |

## **Our Home Safety Product Range**



#### X-Series **Battery Powered** Carbon Monoxide Alarms

#### X-Series **Battery Powered** Fire Alarms



SF340 Series Hard-Wired Carbon Monoxide Alarm









Our X-Series battery powered CO alarm range offers a seven or ten year maintenance-free lifetime. Three models provide different display options designed to enhance safety in critical situations, including a patent pending alarm evacuate visual indication.

The Honeywell range of smoke and heat alarms has been engineered for ultimate performance and reliability. Featuring a ten year lifespan and warranty; low profile design; and easy installation, they are ideal for professionals dealing with residential fire detection.

The HF500 alarms are designed to deliver a complete solution for the detection of LPG (Liquefied Petroleum Gas) and Natural Gas/Methane. Optimised for use by professionals dealing with flammable leak detection, HF500 is ideally suited for use in private or social housing as well as other forms of residential care.

The SF340 Series is a range of reliable, hard-wired Carbon Monoxide alarms with battery back-up. They are designed for use in all domestic and light commercial environments.

#### e<sup>z</sup>sense Battery Flammable Gas Alarm



ezsense is the most convenient way to detect Natural Gas, Propane, Butane, LPG and LNG. It is compact and light on the pocket in more ways than one.

Contact us:

Find out more

#### **UK Customer Service Centre:** Honeywell Analytics Ltd.

www.homesafety.honeywell.com www.honeywellanalytics.com

4 Stinsford Road Nuffield Industrial Estate Poole, Dorset BH17 0RZ Tel: +44 (0)1202 645577 Fax: +44 (0)1202 665331 consumer@honeywell.com

Acts for and on behalf of Life Safety Distribution AG, Javastrasse 2, 8604 Hegnau, Switzerland by its Authorised Representative Honeywell Inc.

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract.

