



# NX-595E

LAN Interface for alarm reporting and remote access

## General

The NX-595E is the new network interface for the NetworX security system family. The NX-595E feature set offers solutions for IP alarm reporting as well as for the end-user who wants to control his security system.

## Reporting options

The NX-595E can report events to 2 different Osborne-Hoffman IP receivers for dual, split, or backup reporting. The NetworX control panels can also be configured for PSTN or GSM backup should the network communication fail.

Events may also be sent to three e-mail addresses. An email contains the free programmable email sender address, includes the time and date stamp of the event and will identify the area, zone and user by name. No mail server needs to be programmed.

In case of an event, the NX-595E can be programmed to dial up to 3 phone numbers and talk to the user in a human voice.

## Remote control for user and installer

An App is available for Apple iPhone/iPad and Google Android smart phones. It allows viewing the system status, offers system controls such as bypass zones, arm and disarm, read the event history and manual control up to two relay outputs. The setup only requires to enter the NX-595E unique serial number and access code in the App. The user and installer can log in using their username and PIN code. No complicated port forwarding is required.


An end-user can dial into the NX-595E from any DTMF telephone and by means of the built-in Personal Voice Guide (PVG) perform all user commands such as requesting the system status, change PIN codes, arm and disarm the system, update entry/exit messages on NX-181xE voice keypads. With installer rights, the entire system can be programmed using the PVG menus.

## Built-in web server

Similar to the UltraConnect App, a user can log on and from the web browser arm/disarm individual partitions, check the system status, change users, change text labels, modify email accounts and voice phone numbers.

## Local intercom

In combination with the NX-181xE voice keypads, the NX-595E can establish an audio connection between one keypad and another keypad. Voice announcements can also be broadcasted from all keypads at the same time.

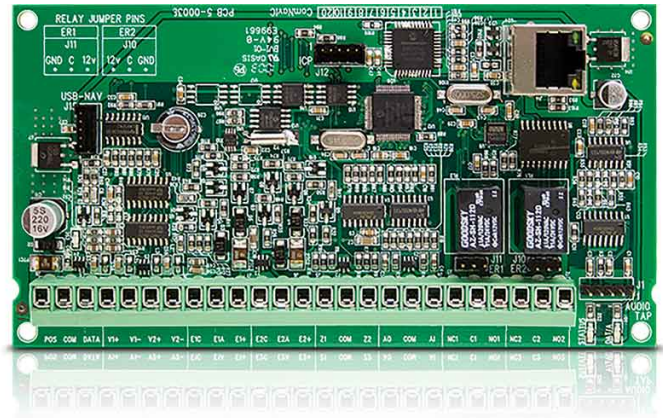

## Standard Features

- Private alarm reporting to 3 email accounts and 3 phone numbers
- CMS alarm reporting to OH-NetRec in SIA and CID
- Option to enable panel or other dialer as backup for OH IP reporting
- Ultraconnect App
- Built-in web server
- Program text labels for NX-1820E touchpad
- Remote access and control via DTMF
- Personal Voice Guide
- Local intercom and listen-in in combination with NX-181xE
- 2 relay outputs on-board
- DHCP and SSL support
- Real-time clock
- Firmware upgradable via USBUP

# NX-595E

LAN Interface for alarm reporting and remote access

## Specifications

Compatibility	NetworX control panels as of version V2 (NX-4, NX-6, NX-8, NX-8E, NX-7, NX-9, NX-10 and NX-11)
<hr/>	
Language	
email	English
Personal Voice Guide	English
<hr/>	
Electrical	
Operating voltage	12VDC supplied from panel
Current consumption	Max 250 mA
Wiring	NetworX 3-wire data communication bus
<hr/>	
Operating Temperature	0 to 49°C
Dimensions (L x W x H)	220 x 90 x 45 mm
<hr/>	
Weight	0.130 kg

## Ordering Information

Part No.	Description
NX-595E-UK	

