



Product Data Sheet

DC115

Surface - overhead - door mount contact - biased

Industrial Contact

The DC115/DC118 are designed to be installed in commercial and industrial environments where a rugged sealed unit is required. It is ideal for metal doors, overhead doors, fences and gates. Each model features a high strength extruded aluminium housing and is completely encapsulated in an exclusive polyurethane potting compound.

Comprehensive Range

The range features wide gap distances and several models to meet any application need. Armoured cable is available.



Standard Features


- Mounting brackets available for gates, garage doors, freezers
- Rugged construction for long life
- Convenient surface mounting
- 2 m armoured cable
- Tamper loop provided
- DC115 is polarity-sensitive with reference to magnet direction

DC115

Surface - overhead - door mount contact - biased

Specifications

Operating gap	9 mm (min.); 62 mm (max.)
Connections (armoured cable)	5 wires, 2 m
Contact type	CO
Dimensions (W x H x D)	
Magnet	76 x 12 x 25 mm
Contact	76 x 12 x 25 mm
Material	Anodised aluminium finish

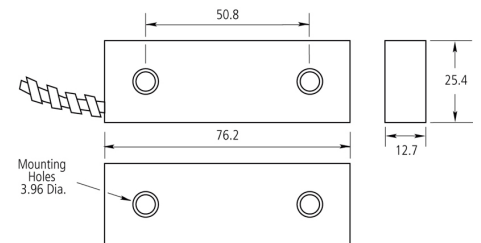

Ordering Information

Part No.	Description
DC115	Surface - overhead - door mount contact - biased
DC118	Surface - overhead - door mount contact - wide gap
DC111	Surface - overhead - door mount contact - triple biased
DC1912	L Bracket for DC110, DC115, DC118

