

**DS-D2065LU-Y
LCD Display**

The DS-D2065LU-Y LCD display uses an industry-level ultra-narrow bezel design, which enables a bezel width of 3.5 mm between neighboring displays. The adopted direct-lit LED backlighting technology helps achieve ultra-high and uniform brightness of 500 cd/m² without boundary shadows. The display has abundant interfaces for video inputs, such as DVI, VGA, HDMI, and DP.

- 4K signal input, auto loop up to 30 screens with HDMI interfaces
- Switching between six picture modes: Standard/Meeting/Movie/Monitoring/Text/User
- Factory calibration for color and brightness uniformity
- Direct-lit LED backlight with uniform brightness and no boundary shadows
- 3840 × 2160 resolution, 178° viewing angle
- Ultra-narrow 3.5 mm bezel design
- Anti-glare, high definition, high brightness, high color gamut, and vivid images with rich colors
- Stable and 24-hour continuous working
- Metal casing for preventing from radiation and magnetic & electric field interference
- Wall-mount and modular brackets available to meet various installation requirements


▪ Specification

Key Material	
Panel manufacturer	BOE
Panel type	DV650QUM-NV0
Display	
Screen Size	65 inch
Active Display Area	1428.48 (H) mm × 803.52 (V) mm
Backlight	Direct-lit LED backlight
Pixel Pitch	0.372 mm
Bezel Width	2.3 mm (top/left), 1.2 mm (bottom/right)
Resolution	3840 × 2160@60 Hz (downward compatible)
Brightness	500 cd/m ²
Viewing Angle	Horizontal 178°, vertical 178°
Color Depth	8 bit, 16.7 M
Contrast Ratio	1200 : 1
Physical Seam	3.5 mm
Response Time	10 ms
Color Gamut	72% NTSC
Surface Treatment	Haze 25%, 3H
Built-in System	
Platform solution	NT68400
Mainboard model	70308
Interface	
Video & Audio Input	HDMI × 1, DVI × 1, VGA × 1, DP × 1, USB × 1
Video & Audio Output	HDMI × 1
Control Interface	RS232 IN × 1, RS232 OUT × 1
Power	
Power Supply	100-240 VAC, 50/60 Hz
Power Consumption	≤ 260 W
Standby Consumption	≤ 0.5 W
Power Mode	MLT5501-KM
Working Environment	
Working Temperature	0°C to 40°C (32°F to 104°F)
Working Humidity	10% to 80% RH (non-condensing)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Storage Humidity	10% to 90% RH (non-condensing)
General	
Casing Material	SECC
VESA	800 (H) mm × 600 (V) mm
Product Dimension (W × H × D)	1432.58 mm × 807.62 mm × 85.1 mm (56.4" × 31.8" × 3.35")
Package Dimension (W × H × D)	Carton with a single display: 1630 mm × 1013 mm × 302 mm (64.17" × 39.88" × 11.89")
Net Weight	29.2 ± 0.5 kg (64.37 ± 1.1 lb) for single display
Gross Weight	Carton with a single display: 59.4 ± 0.5 kg (130.95 ± 1.1 lb)

Packing List	LCD display × 1, power cable × 1, network cable × 1, 2-meter HDMI cable × 1, screw × 4, remote control × 1, IR receiver × 1, RS-232 converter × 1, quick start guide (multilingual) × 1, quick start guide (English) × 1
--------------	--

Physical Interface


Interface	Description	Interface	Description
POWER	Power indicator	DVI IN	DVI-I input interface for digital signals
LINE OUT	Audio output interface for analog signals	RS 232 OUT	Serial loopback output interface
HDMI OUT	HDMI output interface for digital signals	RS 232 IN	Serial input interface
HDMI IN	HDMI input interface for digital signals	USB	USB interface
DP IN	DP input interface for digital signals	IR	IR input interface
VGA IN	VGA input interface for analog signals	SWITCH	Switch button

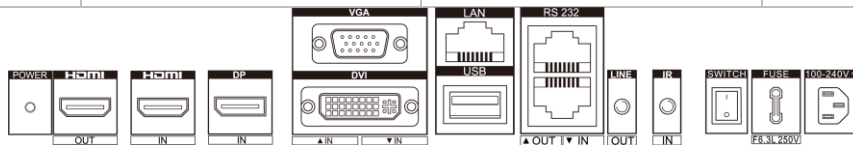

Available Model

DS-D2065LU-Y(一包一纸箱)


Dimension

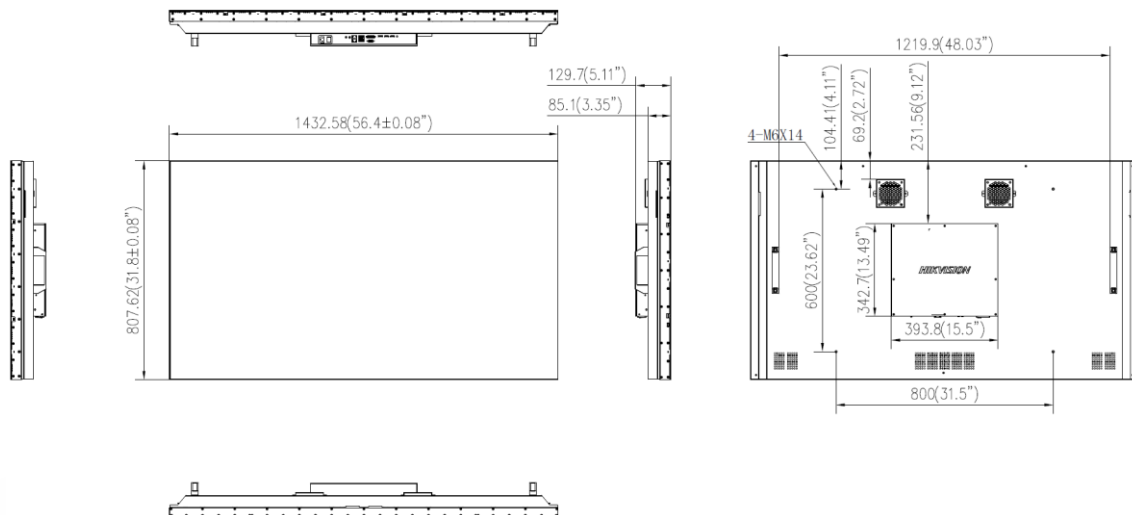

Accessory

Optional

DS-DN65B1M/F Modular Bracket(Frame)	DS-DN65B1M/B Modular Bracket(Base)	DS-DN6500W/U Wall-mounted Bracket	DS-DN6501W Wall-mounted Bracket
---	--	---	---------------------------------------

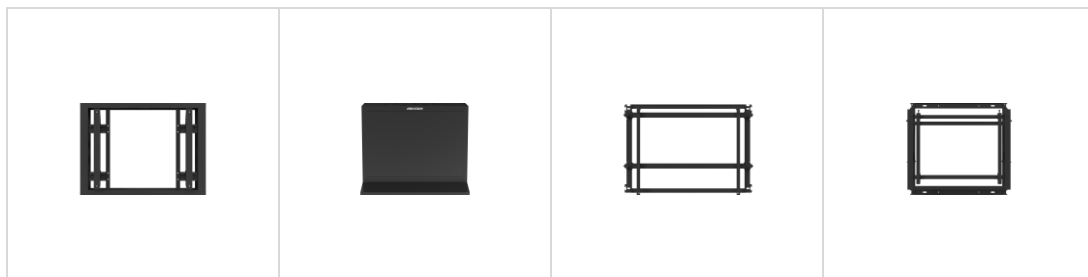

See Far, Go Further



www.hikvision.com
support@hikvision.com

