


Waterproof Electric Bolt

Parameters


Face Plate	230Lx30Wx37H(mm)
Strike	110Lx30Wx3H(mm)
Decorative Panel	230Lx35Wx0.7H(mm)
Bolt	16mmDIA, stainless steel 16mm throw
Solid Bolt Holding Force	Polishing stainless steel, bearing 800kg
Signal Output	Door signal(NO/COM); Lock signal(NO/NC/COM)
Voltage	12VDC(Need order 24VDC)
Current	500mA
Feature	Fail Safe
Waterproof Level	IP 66
Suitable for	Wooden door, metal door, glass door
Induction Distance	8 mm
Face Place Material	High strength aluminum alloy
Weight	0.6 kg
Patent Number	202321292124.2

Dimensions

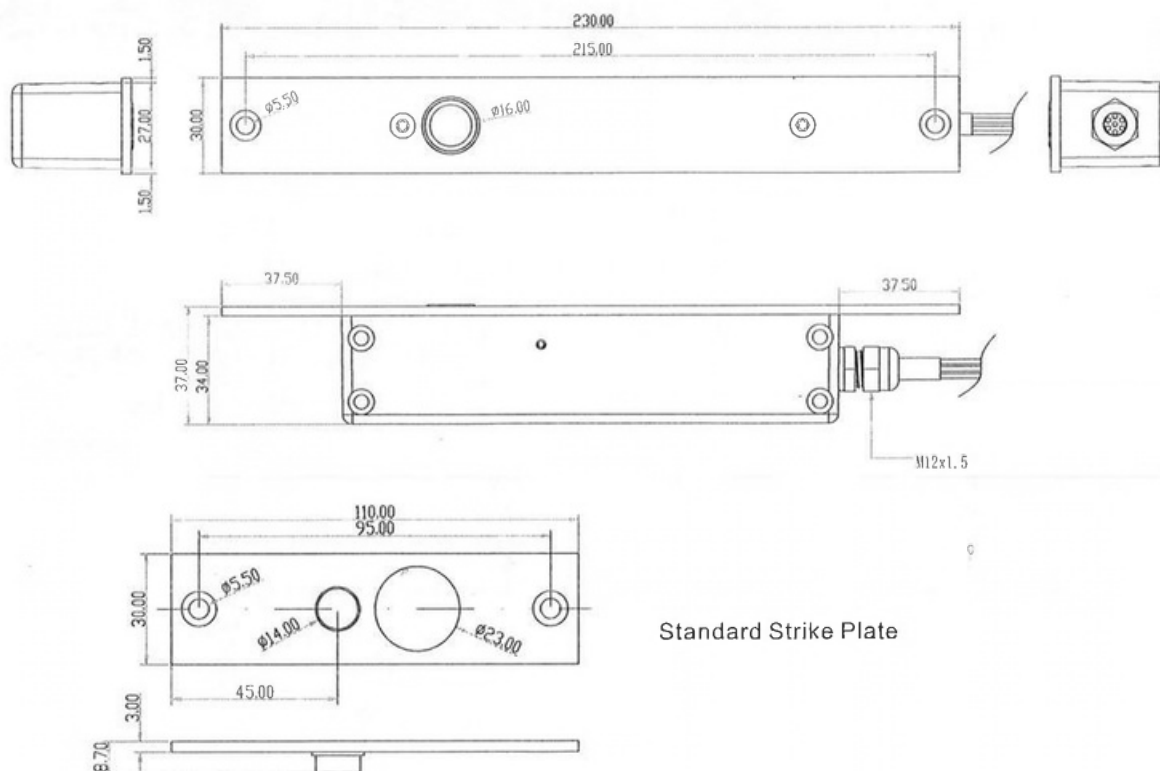


Standard Strike Plate


Installation

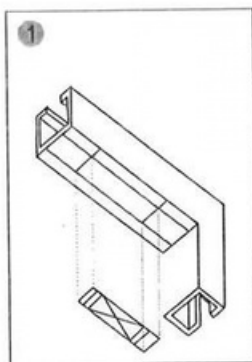


Place lock body template to match with door frame center line

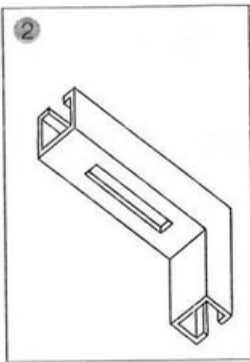


Cut hole

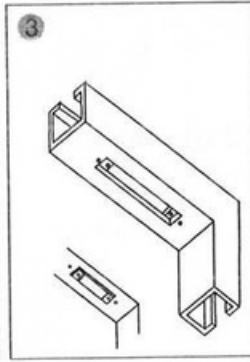


Fix mounting plate (For hollow metal frame)

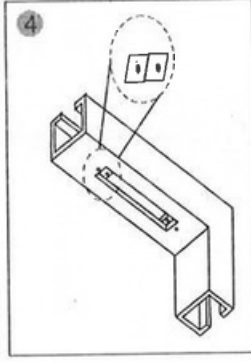

Connect wires

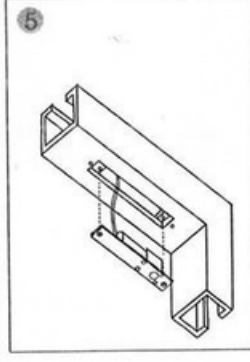


Mount lock body on the door frame and test

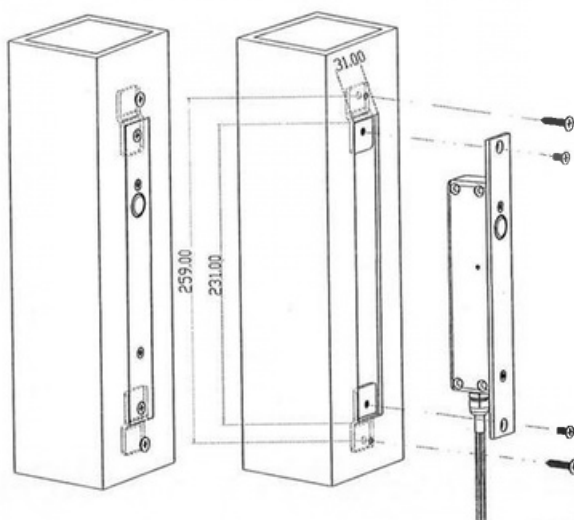


Wiring diagram

	Red	—	+	
	Black	—	-	
	Green	—	NO	Door signal
	White	—	COM	
	Blue	—	NO	Lock signal
	Orange	—	NC	
	Yellow	—	COM	

Installation Schematic

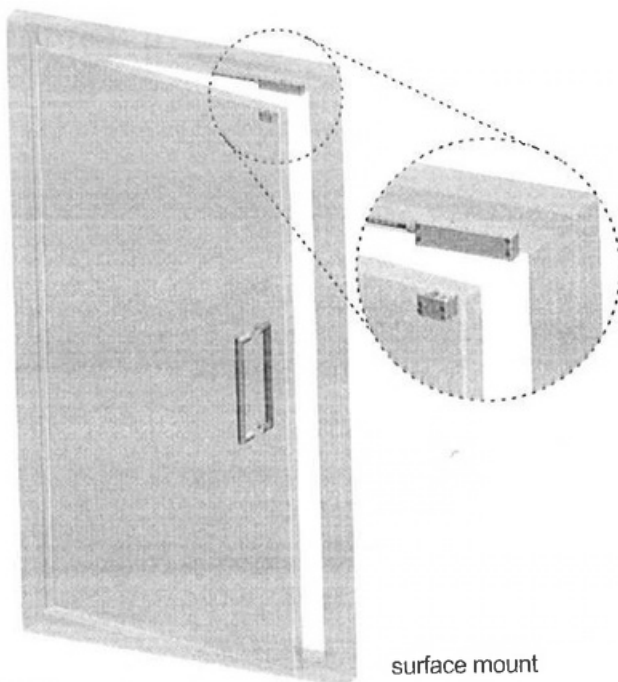

surface mount

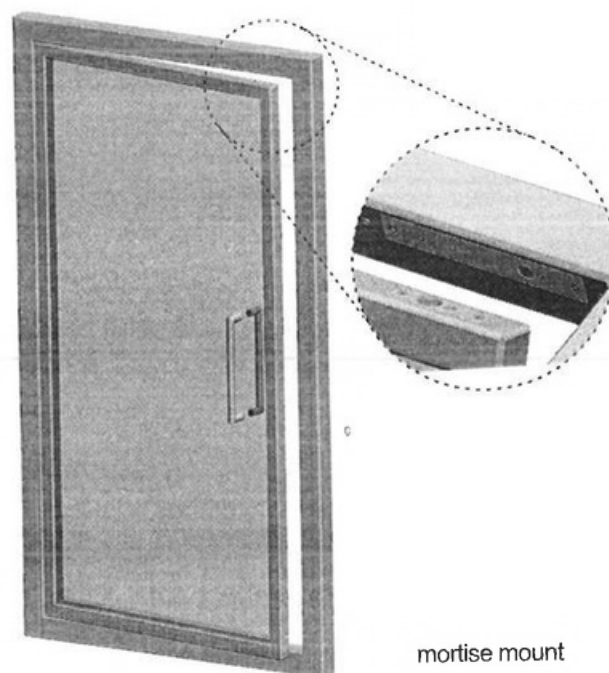

mortise mount