

DC107S60

Inbouwcont., sabotagelus, 2,5m, wit, ±9mm, NC. Incl 6m kabel. VDS klasse B

Product overview

The DC107/124/125/887/888 contacts are designed specifically for use in steel doors commonly found in commercial building applications. Many models including, wide gap, CO and biased for high security applications make the series the most widely used and comprehensive line available.

Easy Installation

The unique housing design features a rugged unibody construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.



Details

- Special design for steel mounting
- Self-lock mounting
- Comprehensive product range
- Standard 2 m wire length
- Tamper loop provided
- Built-in resistors available to special order

DC107S60

Inbouwcont., sabotagelus, 2,5m, wit, ±9mm, NC. Incl 6m kabel. VDS klasse B

Technische specificaties

Algemeen

Type toepassing	Verzonken montage
Type contact	NC
Aansluiting	4 wires, 6 m

Bedraad / draadloos


Bedraad / draadloos	Bekabeld
Werkingsafstand	9 mm (max.)

Fysiek

Fysieke afmetingen	22 x 39 mm (Ø x H)
Boorgatdiameter	19 mm

Regelgeving

EN50131 Grade	Grade 2
---------------	---------

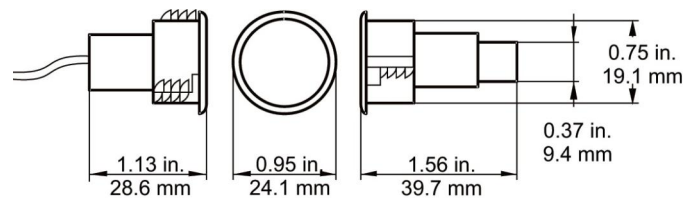

Als een bedrijf van innovatie behoudt Carrier Fire & Security zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 23 April 2024 - 14:41